




**273 ITK PLUS®**

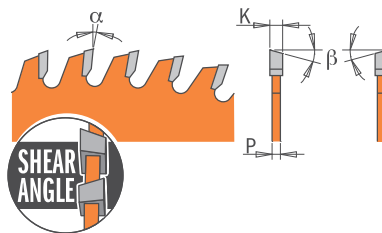

HW

★ ★ ★ ★ ★  
**PERFORMANCE**

**WOOD**

**Machines**



Blade diameter compatibility is contingent on machine type.

**Applications**



**Materials**



For specific details regarding suggested materials, please check blade label.

D mm	B mm	PIN HOLE	Z	K mm	P mm	$\alpha$	$\beta$		ORDER NO.
50	10	-	20	1,1	0,8	15°	10° ATB	10	273.050.20D ●
80	10	-	36	1,6	1,0	15°	10° ATB	10	273.080.36D ●
160	20 (+16)	2/6/32	56	1,8	1,2	12°	10° ATB + 8° Shear	10	273.160.56H
165	20 (+15,87)	2/6/32	56	1,6	1,0	12°	15° ATB + 8° Shear	10	273.165.56H
190	30 (+20+16)	2/7/42	64	1,7	1,1	15°	10° ATB + 8° Shear	10	273.190.64M
216	30	2/7/42	64	1,8	1,2	-5° Neg.	10° ATB + 8° Shear	10	273.216.64M
250	30	COMBI3	80	2,4	1,6	12°	10° ATB + 8° Shear	10	273.250.80M
300	30	COMBI3	96	2,6	1,8	12°	10° ATB + 8° Shear	5	273.300.96M

● Ideal for PROXXON® (Materials: Wood, Plastic, Non-ferrous)