

DEWALT®

ANCHORS & FASTENERS



INTEGRATED WASHER

with serrations under the head secures the attachment



IDENTIFYING MARK

diameter, length and product marks embossed on head for easy identification

ENGINEERED STEEL

designed to cut through hard concrete and maintain ductility (bends before breaking)

STANDARD BIT
designed for ANSI carbide drill bits

DUST RELIEF THREAD PROFILE

improves speed & reduces effort for fast installation

LARGEST RANGE

for top of masonry wall

THE ONLY APPROVED
mechanically galvanized screw anchor for pressure treated lumber



Screw-Bolt+™

Concrete and Masonry Screw Anchor




APPROVED FOR GROUTED CONCRETE BLOCK (CMU)
no load reduction in bed joints



AVAILABLE IN MECHANICALLY GALVANIZED ZINC
approved for pressure treated lumber

COMPREHENSIVE SELECTION

A wide range of diameters and lengths (zinc & galvanized)

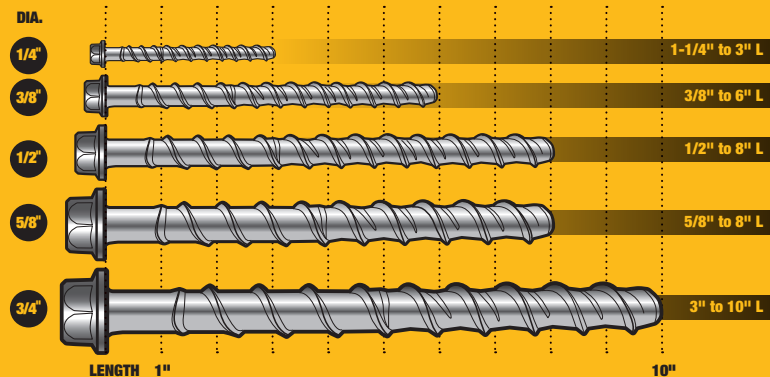



Screw-Bolt+™

Concrete and Masonry Screw Anchor

ANCHORS & FASTENERS

SCREW-BOLT+ ANCHORS							
ZINC PLATED	GALVANIZED	ANCHOR	LENGTH	HOLE SIZE	SOCKET SIZE	CTN	MSTR
*PFM1411000	-	1/4" x 1-1/4"	1-1/4"	1/4"	7/16"	100	600
PFM1411020	-	1/4" x 1-3/4"	1-3/4"	1/4"	7/16"	100	600
PFM1411060	-	1/4" x 2-1/4"	2-1/4"	1/4"	7/16"	100	600
PFM1411080	-	1/4" x 2-5/8"	2-5/8"	1/4"	7/16"	100	500
PFM1411100	-	1/4" x 3"	3"	1/4"	7/16"	100	500
*PFM1411160	-	3/8" x 1-3/4"	1-3/4"	3/8"	9/16"	50	300
PFM1411220	-	3/8" x 2-1/2"	2-1/2"	3/8"	9/16"	50	300
PFM1411240	PFM1461240	3/8" x 3"	3"	3/8"	9/16"	50	250
PFM1411280	PFM1461280	3/8" x 4"	4"	3/8"	9/16"	50	250
PFM1411300	PFM1461300	3/8" x 5"	5"	3/8"	9/16"	50	250
PFM1411320	PFM1461320	3/8" x 6"	6"	3/8"	9/16"	50	150
*PFM1411340	-	1/2" x 2"	2"	1/2"	3/4"	50	200
PFM1411360	-	1/2" x 2-1/2"	2-1/2"	1/2"	3/4"	50	200
PFM1411380	-	1/2" x 3"	3"	1/2"	3/4"	50	150
PFM1411420	PFM1461420	1/2" x 4"	4"	1/2"	3/4"	50	150
PFM1411460	PFM1461460	1/2" x 5"	5"	1/2"	3/4"	25	100
PFM1411480	PFM1461480	1/2" x 6"	6"	1/2"	3/4"	25	75
PFM1411520	PFM1461520	1/2" x 8"	8"	1/2"	3/4"	25	100
*PFM1411540	-	5/8" x 3"	3"	5/8"	15/16"	25	100
PFM1411580	-	5/8" x 4"	4"	5/8"	15/16"	25	100
PFM1411600	PFM1461600	5/8" x 5"	5"	5/8"	15/16"	25	75
PFM1411640	PFM1461640	5/8" x 6"	6"	5/8"	15/16"	25	75
PFM1411680	PFM1461680	5/8" x 8"	8"	5/8"	15/16"	25	50
*PFM1411700	-	3/4" x 3"	3"	3/4"	1-1/8"	20	60
*PFM1411720	-	3/4" x 4"	4"	3/4"	1-1/8"	20	60
PFM1411760	-	3/4" x 5"	5"	3/4"	1-1/8"	20	60
PFM1411800	PFM1461800	3/4" x 6"	6"	3/4"	1-1/8"	20	60
PFM1411840	PFM1461850	3/4" x 8"	8"	3/4"	1-1/8"	10	40
PFM1411880	-	3/4" x 10"	10"	3/4"	1-1/8"	10	20

* denotes sizes which are less than the minimum standard anchor length for Strength Design. The published size length of the anchor is measured from under the head.

	DEWALT Screw-Bolt+™	Hilti® Kwik HUS-EZ*	Simpson® Titen HD*	ITW Red Head® LDT*
ICC Approval	ESR-3889 Cracked & Uncracked Concrete ESR-4042 Grout Filled CMU	ESR-3027 Galvanized Not ICC Approved	ESR-2713 Galvanized Not ICC Approved	ESR-3699 5/8" & 3/4" Not ICC Approved
Coating	Zinc & Galvanized	Zinc	Zinc & Galvanized	Zinc & EvireXT™
ANSI Bit	Yes	Yes	Yes	Undersized Bit
Diameters	1/4" -3/4"	1/4"-3/4"	1/4"-3/4"	3/8"-3/4"
Matched Tool	DEWALT	Hilti Tools	No	No

*Hilti and Kwik HUS-EZ are registered trademarks of Hilti Corporation
 *Simpson and Titen HD are registered trademarks of Simpson Strong-Tie Company, Inc.
 *ITW and Redhead are registered trademarks of Illinois Tool Works, Inc.

INSTALLATION TOOLS



DCH293
1-1/8" 20V MAX** SDS Plus Rotary Hammer



DCF887
1/4" 20V MAX** Impact Wrench



DCF899
1/2" 20V MAX** High Torque Impact Wrench

IMPACT RATED SOCKETS



	ANCHOR DIAMETER	SOCKET SIZE	SOCKET DRIVE
DWMT74479	1/4"	7/16"	3/8"
DWMT75122	3/8"	9/16"	1/2"
DWMT75113	1/2"	3/4"	1/2"
DWMT75104	5/8"	15/16"	1/2"
DWMT75125	3/4"	1-1/8"	1/2"

**Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

Dealer Stamp

1-800-4 DEWALT

www.DEWALT.com